

Type I And Type II Safety Cans For Safe Storage and Handling of Hazardous Liquids

GENERAL INDUSTRIAL



U-50-S



U-20-FS



U2-51-S

Galvanized Steel Type I cans are seamless, 24 gauge to resist corrosion and last longer. They have a double wall brass flame arrester and brass pour spout. Optional No. F-15 FM approved self locking yellow HDPE easy pour funnel is available.

Galvanized Steel Type II cans have a double wall brass flame arrester in both the fill and pour spout. Flexible metal spout is 12" long x 1" diameter.

Ordering Information

Part No.	Type	Capacity	Part No.	Type	Capacity
U-10-S	I	1 Gal.	U-50-S	I	5 Gal.
U-20-S	I	2 Gal.	U-50-FS	I	5 Gal.
U-20-FS	I	2 Gal.	U2-26-S	II	2 Gal.
			U2-51-S	II	5 Gal.

Type I and II Galvanized Steel Safety Cans Are Also Available in Yellow or Blue
(Add B or Y to Part Number)

Smokers Butt Receptacle

Excellent for designated smoking areas, a practical container for cigarettes, cigar butts, and matches. Has a 1-3/4" dia. neck to funnel smoking materials into bright yellow, 26 gauge galvanized steel can. Message reads, "Discard Cigarette-Cigar Butts and Ashes Here". Overall height is 32".

Ordering Information

Part No.	Description
1205	Cigarette/Cigar receptacle, 5 gallon capacity



EAGLE SAFETY STORAGE CABINETS

Keep flammable liquids near work areas in Safety Cabinets ... all are constructed of 18 gauge steel. Sides, top, bottom, doors are double walled. 1-1/2" air space between walls. Both vents, with 2" threaded fittings, have fire baffle and cap. Cabinets come in yellow high gloss powder finish with red warning, plus grounding attachment, 3-point key lock and 2" raised, leakproof door sill.

- Each shelf is supported by four brackets
- Shelves are adjustable
- Each shelf can support over 500 pounds
- Meets NFPA Code 30 Requirements
- Meets OSHA Requirements
- Cabinets have four leveling legs



**No. 1932
Two-Door
30 gal.**



**No. 1945
Sliding-Door
45 gal.**



**No. 1947
Two-Door
45 gal.**

GENERAL INDUSTRIAL

Ordering Information

Part No.	Max.Capacity Weight	Door Specs	Approval	Width	Depth	Height	Shelf Depth	Shelves	Weight
1903*	4 gal.	1 Door Self-Closing	-	17-1/2"	18"	22-1/2"	14-3/4"	1	70 lbs.
1904*	4 gal.	1 Door	-	17-1/2"	18"	22-1/4"	14-3/4"	1	69 lbs.
1924	12 gal.	1 Door Self-Closing	-	23"	18"	35"	14-3/4"	1	135 lbs.
1925	12 gal.	1 Door	-	23"	18"	35"	14-3/4"	1	133 lbs.
1905	16 gal.	1 Door Self-Closing	-	23"	18"	44"	14-3/4"	1	150 lbs.
1906	16 gal.	1 Door	-	23"	18"	44"	14-3/4"	1	150 lbs.
1932	30 gal.	2 Doors	FM	43"	18"	44"	14-3/4"	1	247 lbs.
1947	45 gal.	2 Doors	FM	43"	18"	65"	14-3/4"	2	342 lbs.
1962	60 gal.	2 Doors	FM	31-1/4"	31-1/4"	65"	28"	2	354 lbs.
1930	30 gal.	Sliding Door	FM	43"	18"	44"	14-3/4"	1	253 lbs.
1945	45 gal.	Sliding Door	FM	43"	18"	65"	14-3/4"	2	340 lbs.
1960	60 gal.	Sliding door	FM	31-1/4"	31-1/4"	65"	28"	2	358 lbs.
3010	30 gal.	2 Doors Self-Closing	FM	43"	18"	44"	14-3/4"	1	257 lbs.
4510	45 gal.	2 Doors Self-Closing	FM	43"	18"	65"	14-3/4"	2	353 lbs.
6010	60 gal.	2 Doors Self-Closing	FM	31-1/4"	31-1/4"	65"	28"	2	364 lbs.
ADD-14	15 gal.	2 Doors Self-Closing	-	43"	18"	22-1/4"	14-3/4"	Optional	145 lbs.
ADD-15	15 gal.	2 Doors	-	43"	18"	22-1/4"	14-3/4"	Optional	135 lbs.

*This item may be shipped by UPS

CALL
800.833.0247
281.479.9700

FAX
800.282.4365
281.479.6321

CALL US TODAY

-411-

www.safetyfire.com

Plier Clamps

The ease of use and reliable positive ground connection has made the REB clamp the finest drum grounding clamp. Features including a die cast aluminum body, stainless steel points and a 55 lb. spring, enable the REB clamp to consistently make a positive metal to metal ground connection. The cable connection is made in the clamp's handle and held by dual allen screw contacts. Clamps can be equipped with 1/8" diameter stainless steel cable in lengths as required. With the cable terminal connected to a ground, this unit provides a low resistance discharge path wherever personnel are engaged in pouring paint thinner or other volatile fluid. (FM Approved)



Ordering Information

Part No.	Description
REB2960	Clamp with stainless steel points


JR-150 Series Pipe Clamps

The JR-150 series of pipe clamps provide a semi-permanent ground connection to water pipes. Each bronze clamp is made in two halves, with teeth designed to bite through paint into the metal pipe. The clamps come in sizes from 1/2" to 6" pipe.



Ordering Information

Part No.	Description
JR-150-4	1/2"
JR-150-6	3/4"
JR-150-8	1"
JR-150-10	1-1/4"
JR-150-12	1-1/2"
JR-150-16	2"
JR-150-20	2-1/2"
JR-150-24	3"
JR-150-32	4"
JR-150-48	6"

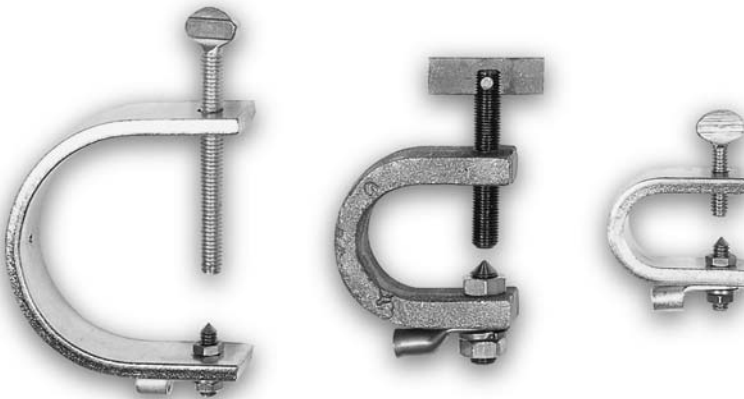

C-Clamps


"C" clamps are widely used for semi-permanent connections to drums or loading racks. Both galvanized and bronze models provide positive connections with the tightening down of the screw point.

Ordering Information

Part No.	Description
EP-1	Galvanized Ground Clamp (7/8" opening)
EP-2	Galvanized Ground Clamp (2-1/2" opening)
EP-3	Bronze Clamp (1-1/8" opening)

GAT Series Aluminum Clamps

GAT clamp is a durable aluminum plier clamp for grounding tank cars and trucks. The clamp is equipped with three stainless steel points to provide proper continuity. **GAT-P** clamp is equipped with a quick release harness which will release automatically should the vehicle be moved prior to release of the clamp. **GAT-P-IP** clamp is equipped with a quick release harness, ball receptacle and isolated points for use in positive electrical ground indication systems.

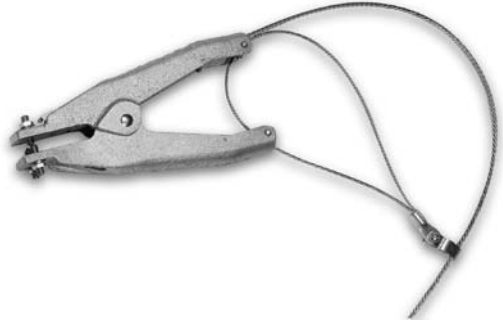

Ordering Information

Part No.	Description
GAT	Without Release Harness
GAT-P	With Release Harness
GAT-P-IP	Isolating Grounding Clamp

G-40 Series Bronze Clamps

G-40 series bronze plier clamps are designed for use in grounding rail cars and tank trucks. The series of clamps have 2 or 3 stainless steel points and some models are provided with quick release harnesses. 1/4" Calsun Bronze Cable can be supplied in required lengths either separately or attached to the clamps for complete assemblies.



Ordering Information

Part No.	Description
G-40	2 Stainless Points, without chain release
G-40-P	2 Stainless Points, with chain release
G-40-C	3 Stainless Points, without chain release
G-40-PC	3 Stainless Points, with chain release
G-40-PCU	3 Stainless Points, with chain release and connection for 3/8" ball attachment (ball attachment sold separately)
G-12	3/8" Bronze Ball
G-40-PM	3 Stainless Points with chain release, designed for neoprene or 1/4" bronze cable

Standard Grounding Assemblies

To satisfy the requirements of most grounding and bonding specifications, Stewart R. Browne Mfg. Grounding Clamps and Cable can be assembled in various clamp configurations and cable lengths. The following assemblies are provided with 3 ft. bare Stainless Steel Cable (Nylon coated cable available upon request).

Ordering Information

Part No.	Description
R-1	(2) REB Clamps and Cable
R-2	(1) REB Clamp, Lug and Cable
R-3	(1) REB Clamp, JR150-8 (1") and Cable
R-4	(1) REB Clamp, EP-1 and Cable



Call for a free copy of Grounding and Bonding Applications and Grounding Surveys

Retract-A-Clamps™

The Retract-A-Clamp™ coil static grounding clamp provides an effective cost efficient and easy-to-use system. Retract-A-Clamp™ incorporates a corrosion resistant vinyl coated coiled grounding cable and a rugged plier type clamp.


The Retract-A-Clamp™ with the REB clamp and cable lengths from 5 to 30 feet is ideal for work around 55 gallon drums. The GAT-P clamp with the quick release harness is available in the model RAC20.

The coils are available in the following models:

Ordering Information

Part No.	Description
RAC5	5 ft. of Cable and REB Clamp
RAC10	10 ft. of Cable and REB Clamp
RAC10+10	20 ft. of Cable and REB Clamp
RAC20	20 ft. of Cable and GAT-P Clamp
RAC10+10-2	10 ft. of Cable and 2 REB Clamps
RAC10-P	10 ft. of Cable with REB & 1/2" Pipe Clamp
RAC10-C	10 ft. of Cable with REB & EP-1 Clamp
RAC20B	20 ft. of Cable and G-40PC Clamp

*Other assemblies are available upon request.

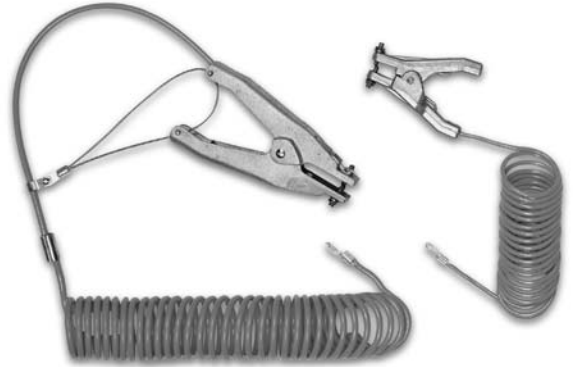

Static Grounding Reels

The use of static cable reels is a long standing method of providing good storage area for cables, away from the corrosive and hazardous elements. The static reels come in the following sizes:

Ordering Information

Part No.	Description
R-20	Cable Reel w/20 ft. of cable and REB clamp
R-50	Cable Reel w/50 ft. of cable and REB clamp
G-50	Cable Reel w/50 ft. of cable and GAT-P clamp
200-20R	Cable Reel w/20 ft. of cable w/alligator clip
700-50R	Cable Reel w/50 ft. of cable w/alligator clip

Storing static grounding clamps and cable adds effective life to grounding systems by keeping the cables away from railways, ramps, chemical spills on floors and tripping hazards.

